

# RP-033-M




Portable electric heater

## Technical data

	DESCRIPTION	UNITS	DATA
DATA TECHNICAL	Maximum power rating	Kw	3
	Minimum power rating	Kw	1,5
	Air flow	m3/h	450
	Thermal performance	%	100
	Supply temperature at 20°C (20 kW/ 30 kW)	°C	32-44
	Noise level	dB(A) 1m	67
	Electrical voltage	V	230-I-50Hz
	Power consumption (Min/Max)	To	6,5 – 13
DIMENSIONS	Dimensions (Length/Width/Height)	mm	367x180x280
	Hot air outlet	mm	-
	Weight	kg	5
CERTIFICATES			CE

## Operating scheme

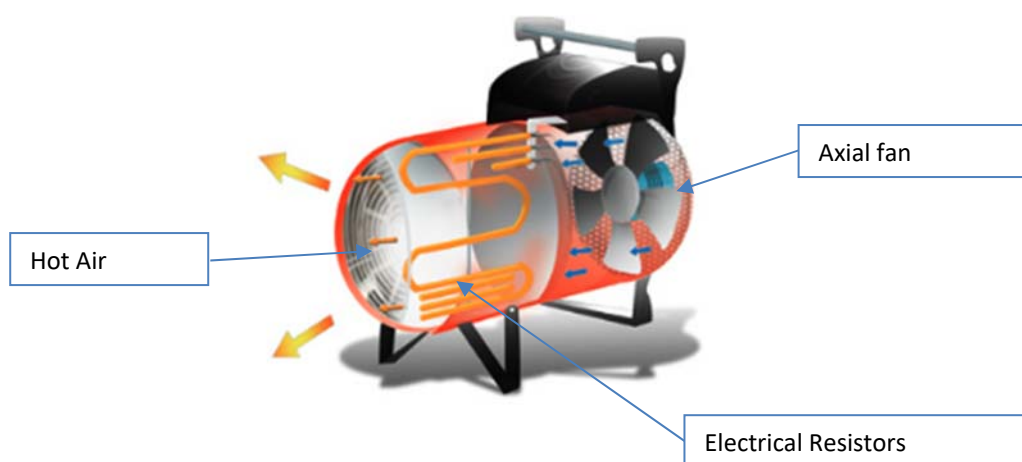

Data sheet

# RP-033-M



Portable electric heater

## Construction details

RP electric heaters are prepared to be able to operate with electricity and their construction characteristics are:

- Armored electric heating elements in AISI 321 stainless steel
- Excellent heat exchange
- Front protection grille
- 2 heating powers + 1 ventilation
- Low-noise axial fan
- Heating or ventilation-only mode selector
- Control and safety electrical panel under European standards

## Installation examples

