

RP-100-T


Portable electric heater



Technical data

	DESCRIPTION	UNITS	DATA
DATA TECHNICAL	Maximum power rating	Kw	10
	Minimum power rating	Kw	6,6
	Air flow	m ³ /h	1.500
	Thermal performance	%	100
	Supply temperature at 20°C (20 kW/ 30 kW)	°C	30-48
	Noise level	dB(A) 1m	68
	Electrical voltage	V	400-III-50Hz
	Power consumption (Min/Max)	To	7,1 – 13,6
DIMENSIONS	Dimensions (Length/Width/Height)	mm	505x277x511
	Hot air outlet	mm	Ø300
	Weight	kg	13
CERTIFICATES			CE

Operating scheme

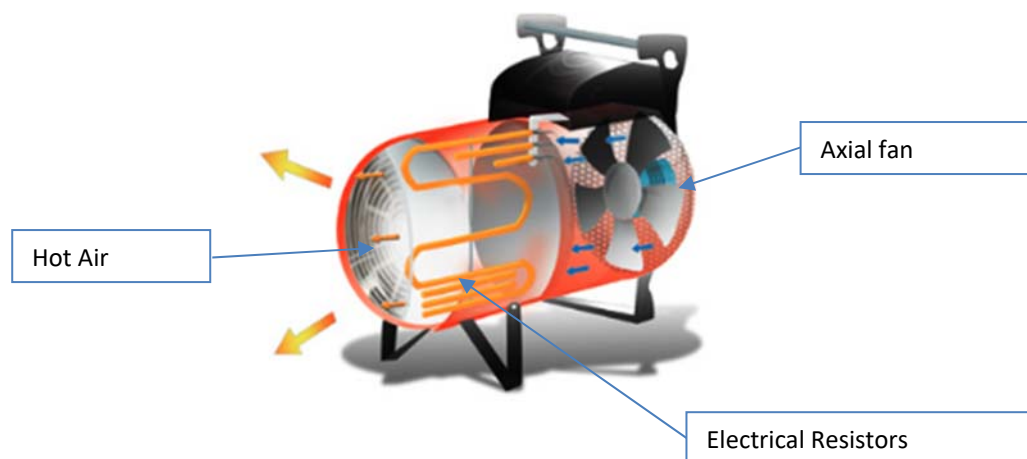

Data sheet

RP-100-T

Portable electric heater



Construction details

RP electric heaters are prepared to be able to operate with electricity and their construction characteristics are:

- Armored electric heating elements in AISI 321 stainless steel
- Excellent heat exchange
- Front protection grille
- 2 heating powers + 1 ventilation
- Low-noise axial fan
- Heating or ventilation-only mode selector
- Control and safety electrical panel under European standards
- Preheating and Post-cooling of the electrical heating elements
- Possibility of applying air conduction hose

Accessories

Hose connector



Air Supply Hose 6m

T MAX 100° C



Installation examples

