

# RP-220-T


Portable electric heater



## Technical data

	DESCRIPTION	UNITS	DATA
DATA TECHNICAL	Maximum power rating	Kw	22
	Minimum power rating	Kw	15
	Air flow	m <sup>3</sup> /h	3.050
	Thermal performance	%	100
	Supply temperature at 20°C (20 kW/ 30 kW)	°C	38-56
	Noise level	dB(A) 1m	71
	Electrical voltage	V	400-III-50Hz
	Power consumption (Min/Max)	To	21 – 30
DIMENSIONS	Dimensions (Length/Width/Height)	mm	700x317x538
	Hot air outlet	mm	Ø350
	Weight	kg	21
CERTIFICATES			CE

## Operating scheme

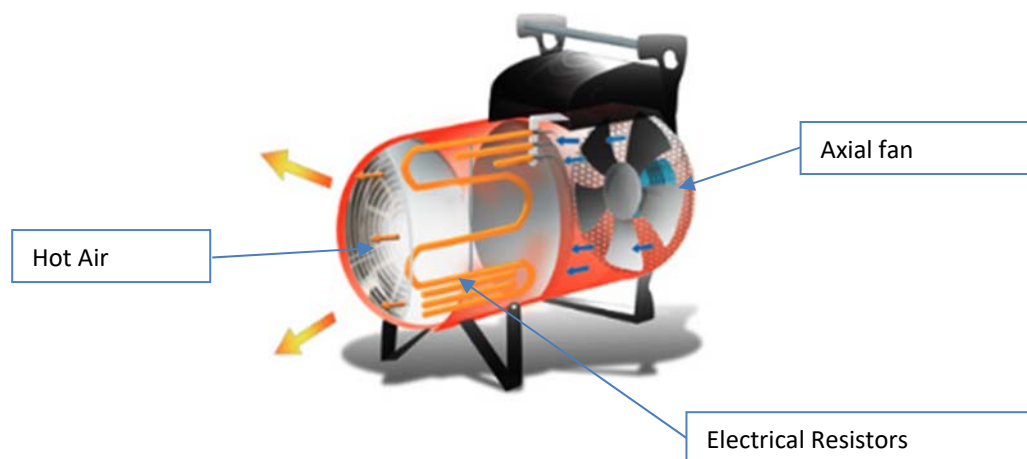

Data sheet

# RP-220-T

Portable electric heater



## Construction details

RP electric heaters are prepared to be able to operate with electricity and their construction characteristics are:

- Armored electric heating elements in AISI 321 stainless steel
- Excellent heat exchange
- Front protection grille
- 2 heating powers + 1 ventilation
- Low-noise axial fan
- Heating or ventilation-only mode selector
- Control and safety electrical panel under European standards
- Post-cooling of electrical heating elements
- Possibility of applying air conduction hose

## Accessories

Hose connector

Air Supply Hose 6m



T MAX 100° C



## Installation examples

